

QuickStart Setup Guide

Legal Warning

System Requirements



Logitech digital video security camera products are intended to be used in a lawful manner. Please note that certain uses of security camera products are prohibited or severely restricted by national, state and local laws, such as employee monitoring, surreptitious viewing and recording of images or sound, or the use, publication or distribution of image and sound recordings. Before using Logitech digital video security camera products you should become familiar with all applicable laws in your country. If you have any concern about certain uses of our products, kindly consult local authorities or local legal counsel.

Below, you can find the minimum and recommended requirements for systems running cameras using the default QVGA (320x240) settings. Running your cameras in the higher VGA (640x480) mode may require additional resources.

The WiLife Video Security System uses your Windows PC to record the video from your cameras and serve video to your remote devices. You need to have your PC on and running for the WiLife system to operate.

Add-On Kit Components



- 1) Add-on Indoor Camera
- 2) Power Supply
- 3) Suction Cup
- 4) Desktop Mount
- 5) Wall Mount Bracket
- 6) 8' Standard Ethernet Cable

Requirement	Number of Cameras					
	1	2	3	4	5	6
CPU Speed:	Minimum 1.0 GHz	1.2 GHz	1.4 GHz	1.6 GHz	1.8 GHz	2.0 GHz
Recommended	1.4 GHz	1.6 GHz	2.0 GHz	2.4 GHz	2.6 GHz	3.0 GHz
Memory (MB):	Minimum 256	384	512	512	512	512
Recommended	384	512	512	768	768	1024
Video Card (MB):	Minimum 32	32	32	64	64	128
DirectX 9 compatible	Recommended 32	32	64	128	128	256
Display Resolution:	1024 x 768 or higher, 32 bit color					
Hard Drive (MB):	100 MB for program and a minimum of 500+ MB for video storage.					
Operating System:	Microsoft® Windows® Vista or Microsoft® Windows® XP Home Edition, XP Professional or, XP Media Center Edition					
Media Player:	Microsoft Windows Media® Player 9 or later					

Indoor Camera Add-On™

Congratulations on purchasing an Add-on Indoor Camera! With this kit, you have the components to mount your new camera wherever you need it—on a window, wall, or flat surface. Your WiLife Video Security System can manage up to six cameras, giving you more power, ease, and extensibility for a reliable home and small business security system.

This QuickStart Setup Guide helps you add your new camera to the WiLife Video Security System. Simply follow the instructions and you will be viewing live video from your new camera in minutes.



Suction Cup Mount




Desk Mount



Wall Mount


Step 1 Run Command Center

Please read all instructions before starting the installation.

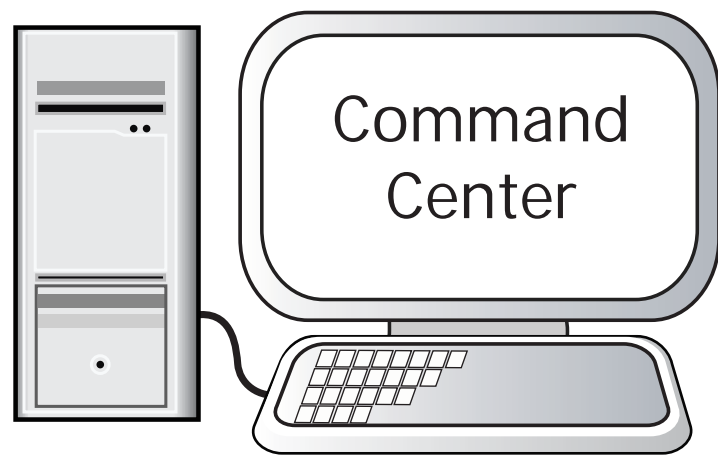


- Have the WiLife Command Center running on your PC.

Step 2 Connect the Power Supply

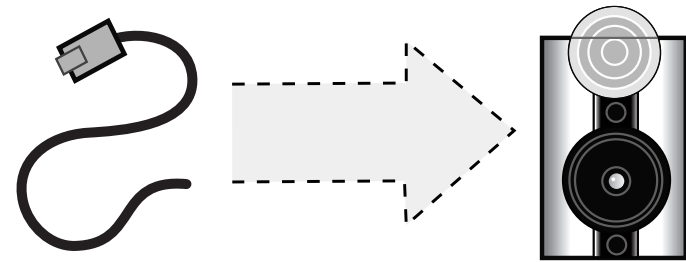


- Plug the Ethernet cable into the camera and into the power supply.

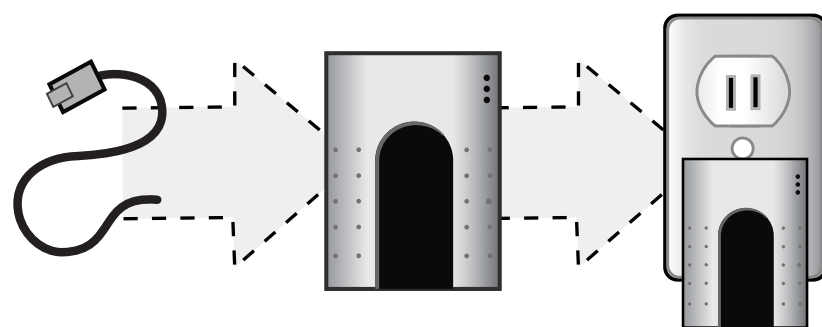

- Plug the power supply module into your wall outlet.


Step 3 Mount the Camera

- Select a location for the camera: wall or ceiling, desktop or window. Then mount the camera using either the suction cup, desktop stand, or wall mount.

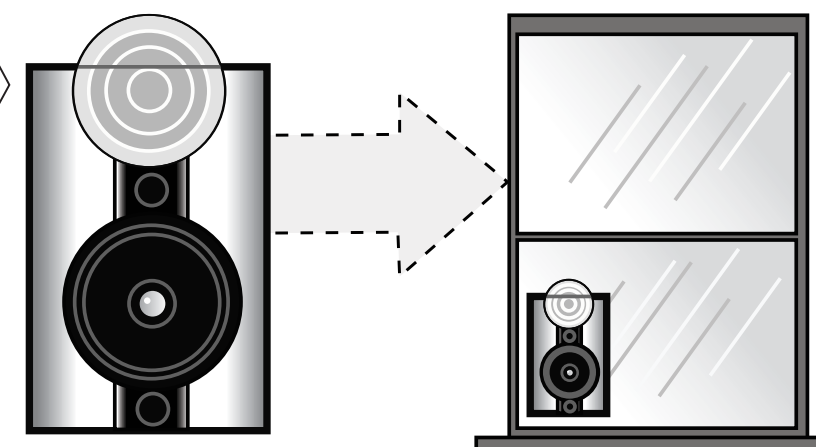

- If you set a custom password in the WiLife Command Center, you will need to complete these tasks:
 - 1) In the Command Center, click Setup and go to the Advanced tab screen.
 - 2) Click the Find My Cameras button. It will take 1 to 2 minutes to locate the camera.

Adjusting the Focus

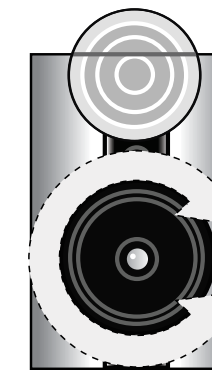

If necessary, focus the lens by adjusting it clockwise or counter-clockwise as necessary. This will require someone looking at the Live View of the software.

HINT: To focus, plug your camera into an outlet near your computer monitor. Once it is focused, you can re-mount your camera without the need to refocus.

Build a Complete Surveillance System



Add-on Indoor Camera



Add-on Outdoor Camera



Add-on Spy Camera

The WiLife Video Security System is available online at www.wilife.com and at other select retail stores and authorized resellers. Visit www.wilife.com to find a store or reseller near you.

Caution:

- To ensure a quality connection, do NOT plug the USB Receiver or Camera power supply into a surge protector or powerstrip. They already have a built-in surge protection and must be plugged directly into your wall outlet.

Additional Mounting Instructions

- Detailed instructions for mounting the camera on a wall, ceiling, or window are located in the Accessories box. The instructions sheet is titled "WiLife Accessories."

Most Popular Logitech WiLife Features

1 Changing Screen Views in WiLife



There are two main screens in the WiLife Command Center software, Live and Playback. Click the GO TO PLAYBACK button to open the Playback screen. Click the GO TO LIVE button to go back to the Live View screen.

The SETUP button opens the Setup dialog screens that allow you to modify settings for your cameras.

The WiLife button opens www.wilife.com.

2 Automatic Recording




WiLife automatically records video when cameras detect motion.

Recorded video segments are saved as .wmv files on your pc's hard drive.

You can find and play back the recorded video segments on the Playback screen.

8 Remote Viewing by PC

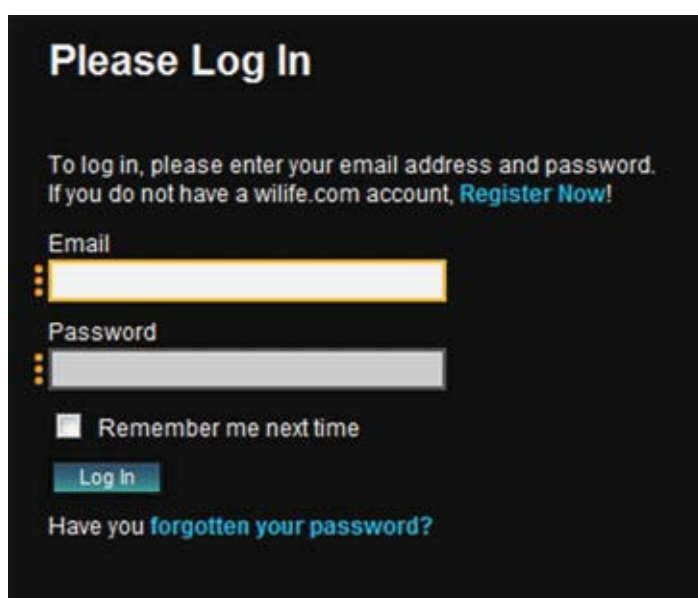

Log into WiLife Online at online.wilife.com and you can access live video from your cameras anywhere in the world, at any time. WiLife automatically determines your system's firewall settings and Internet capability in order to stream video to you in the most direct way possible. If WiLife cannot find a direct path, we send the video through our own WiLife servers to you. Now that's hassle free service!



3 View Recorded Video Clips




The Video Timeline window provides fast access to recorded video segments using the mouse or keyboard. Each camera has a row on the screen. Each recorded segment is displayed as a green bar. A vertical red line shows the current position of playback.



The Calendar shows you days that cameras recorded video. The current day is circled in red. Days in which video segments were recorded appear in bold. You can click on any of those days to display all of the video segments in the timeline. The Calendar has arrow buttons at the top to navigate forward or backward through the months.

4 Using the Playback Controls

Like any DVD player, the Playback Controls allow you to play, pause, adjust speed, and step-through your video segments. You use the controls by clicking on each one. If you hold your mouse over the control, Windows will display a tool tip, indicating the name of each control.

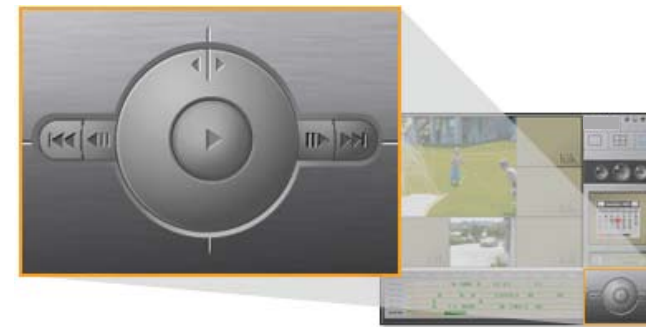

5 Email and Cell Phone Alerts

Receive email and cell phone alerts (messages) when a camera detects motion.

You have the option of receiving one of three message types:

- simple text-only
- text and one frame of video, or
- a video clip.

Go to Setup > Email to set up and activate e-mail and cell phone alerts.



6 Using Motion Detection Zones

By default, each camera automatically records video anytime it detects motion. However, WiLife Cameras also allow you to change from "entire image" motion detection to individually defined zones. In fact, you can set up to 16 distinct motion detection regions. This is useful, for example, if you want to monitor a parking lot and eliminate the detection of traffic along the road.



The settings that you have the ability to control include:

- Turning on/off motion detection
- Setting the motion sensitivity level
- Setting up to 16 detection zones
- Activating the entire image as one detection zone


Motion detection functionality can be set up in the Setup > Recording tab screen.

7 Easily Add More Cameras

You can have up to a total of six WiLife Cameras on your system, allowing you to cover the entire property. Additional cameras can be purchased in the Easy Add-on camera kits for the Indoor, Outdoor, or Spy cameras. Adding new cameras is a simple three-step process:

1. Have your WiLife Software system running.
2. Position the camera on a window, desktop, or wall (using the mounting options available) and connect to the WiLife Power Supply.
3. If you set a custom password, click Setup > Advanced and click Find My Cameras. It will take WiLife 1 to 2 minutes to locate the camera.

9 Remote Viewing by Cell Phones

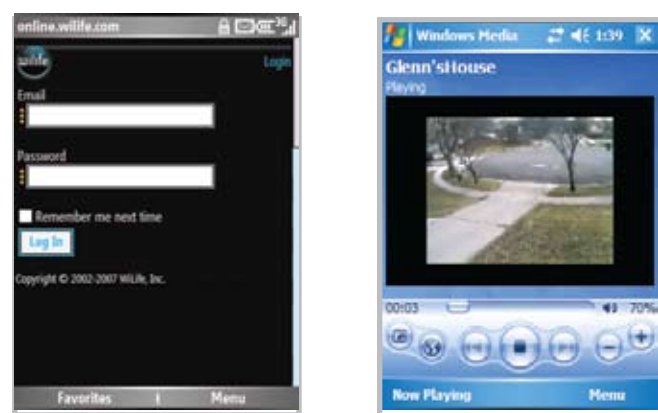

Using a Windows Mobile® enabled wireless PDAs or cell phones, log into WiLife Online at online.wilife.com and you can access live video from your cameras anywhere in the world, at any time.

WiLife automatically determines your phone's bandwidth in order to stream video to you in the most direct way possible. If WiLife cannot find a direct path, we send the video through our own WiLife servers to you. Now that's hassle free service!

11 Upgrade to WiLife Platinum



Upgrade to WiLife Platinum™ and expand your already powerful WiLife Video Security System™ with enhanced monitoring, remote play back, digital pan-tilt-zoom, scheduled alerts, and online video storage.

Adding the advanced capabilities of WiLife Platinum gives you more power and flexibility to protect your property, family, and employees — providing you with the ultimate in video security. Learn more at online.wilife.com.

10 Online System & Camera Updates

Run	Camera Name	Camera Type	Current Version	New Version	Select	Status
1	Engineering	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Programming, 2%
2	Lower Entry	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Programming, 2%
3	Lower West	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Programming, 2%
4	Hallway	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Programming, 2%
5	Upper East	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Transferring, 90%
6	Upper West	WiLife Indoor Camera	2.17	2.19	<input type="checkbox"/>	Transferring, 71%

WiLife will automatically check the software version dates and prompt you to download the latest version. Go to Setup > Advanced and click on Update Camera to accomplish this.

Summary of Limited Product Warranty

Logitech warrants that your Logitech hardware product shall be free from defects in material and workmanship for one (1) year, beginning from the date of purchase. Except where prohibited by applicable law, this warranty is nontransferable and is limited to the original purchaser. This warranty gives you specific legal rights, and you may also have other rights that vary under local laws. Remedies: Logitech's entire liability and your exclusive remedy for any breach of warranty shall be, at Logitech's option, (1) to repair or replace the hardware, or (2) to refund the price paid, provided that the hardware is returned to the point of purchase or such other place as Logitech may direct with a copy of the sales receipt or dated itemized receipt. Shipping and handling charges may apply except where prohibited by applicable law. Logitech may, at its option, use new or refurbished or used parts in good working condition to repair or replace any hardware product. Any replacement hardware product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer or for any additional period of time that may be applicable in your jurisdiction. This warranty does not cover problems or damage resulting from (1) accident, abuse, misapplication, or any unauthorized repair, modification or disassembly; (2) improper operation or maintenance, usage not in accordance with product instructions or connection to improper voltage supply; or (3) use of consumables, such as replacement batteries, not supplied by Logitech except where such restriction is prohibited by applicable law. How to Obtain Warranty Support: Before submitting a warranty claim, we recommend you visit the support section at www.logitech.com for technical assistance. Valid warranty claims are generally processed through the point of purchase during the first thirty (30) days after purchase; however, this period of time may vary depending on where you purchased your product — please check with Logitech or the retailer where you purchased your product for details. Warranty claims that cannot be processed through the point of purchase and any other product related questions should be addressed directly to Logitech. The addresses and customer service contact information for Logitech can be found in the documentation accompanying your product and on the web at www.wilife.com/support. Limitation of Liability: LOGITECH SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOSS OF PROFITS, REVENUE OR DATA (WHETHER DIRECT OR INDIRECT) OR COMMERCIAL LOSS FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON YOUR PRODUCT EVEN IF LOGITECH HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Some jurisdictions do not allow the exclusion or limitation of special, indirect, incidental or consequential damages, so the above limitation or exclusion may not apply to you. Please review the complete Limited Warranty at www.wilife.com/suupport/warranty.

© 2009 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in any manual or on this website. Information contained herein is subject to change without notice.

Product Help

For camera & command center setup instructions, and general screen & feature overviews, please refer to the User Guide located on the Software CD or by pressing the F1 key in Command Center.

For troubleshooting tips, view the User Guide located on the Software CD.

Software updates and other user documentation can be found online at www.wilife.com/support/downloads.

Technical Support

Setup is designed to have your system and cameras running in a few minutes. However, if you are experiencing difficulties or have questions, please contact us. Our support team is available. We have online and phone support to make your setup easy.

Go to <http://www.wilife.com/support> for immediate support. You can email our support team or view help information in our Knowledgebase.

For live support, call our support number: 1.888.469.4543

For customers within the United States and Canada.